B.E.G. LUXOMAT® net




# PSN-230 / 640 / 30 / KNX REG

90214 EAN: 4007529902149

KNX bus power supply for DIN rail mounting with 640 mA, integrated choke, additional unchoked 30V output, and LED status indicator.

## Order data

| Designation | Colour | Art.No |
|---|---|---|
| PSN-230 / 640 / 30 / KNX REG | - | 90214 |

## Technical data

| | |
|---|---|
| Voltage: | 200 – 240 V AC 50 / 60 Hz |
| Dimensions: | 90 x 54 x 55 mm (3 TE) |
| Output voltage: | KNX BUS / 30 V DC |
| Degree / class of protection: | IP20 / Class I |
| Ambient temperature: | -5 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant (PC) |
| Material color: | - |
| Display elements: | Green LED: in operation<br>Red LED: Reset<br>Red LED: overload |
| KNX TP 256: | Yes |
| Connections and wires: | KNX bus terminal black/red |
| Nominal current: | 640 mA |
| Nominal current (max.): | 1300 mA |

## Product information

Compact KNX bus power supply SELV with integrated choke

Auxiliary voltage unchoked 30V DC

Various status indicators via LED

Device for DIN rail mounting in distribution boards

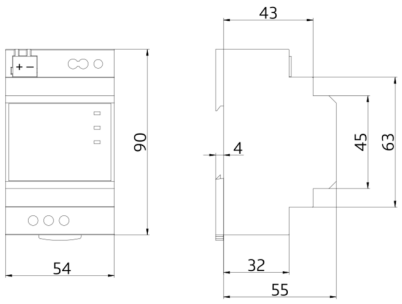
43
90
4
45
63
54
32
55

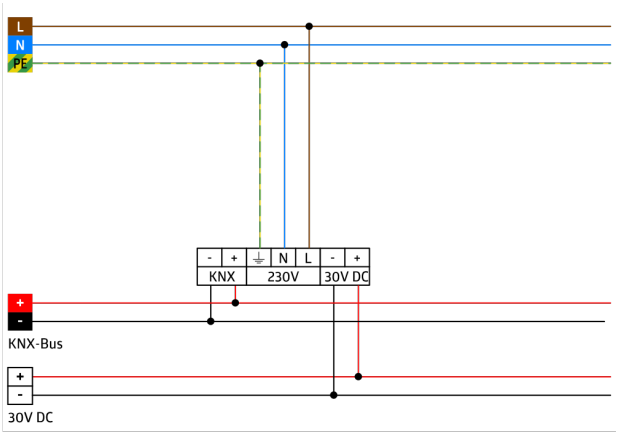
L
N
PE
- + ⏚ N L - +
KNX
230V
30V DC
+
-
KNX-Bus
+
-
30V DC